

MEA 150 CLIPFIX CHANNEL COVERS

A 15, B 125, C 250, D 400**, E 600**

CW 150



BUILDING SUCCESS

PURPOSE OF USE

Channel covers for MEA drainage channels, as part of a drainage system to catch, transport and evacuate rainwater from adjoining surfaces.

** Not suitable for the diagonal or transverse travel of motorways and highways.

MEA 150 CLIPFIX CHANNEL COVERS

A 15, B 125, C 250, D 400**, E 600**


CW 150

BUILDING SUCCESS

MEA 150 CLIPFIX CHANNEL COVERS

With non-bolted CLIPFIX channel cover securement, with longitudinal shift protection.


Suitable for the systems **MEARIN PLUS/EXPERT 150**, **MEARIN PLUS F 150**, **MEADRAIN SV/SE/SG 1500** and **MEADRAIN SVF/SEF 1500**. For drainage channel body and gully, total width of grates 172 mm.

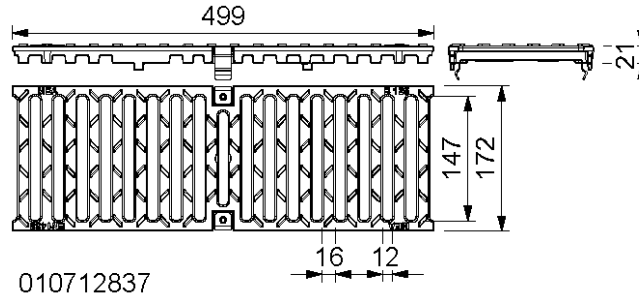


010712837

MEA 150 CLIPFIX, SLOTTED GRATING 12/147, LOADING CLASS B 125 ACCORDING TO EN 1433

Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Ductile Iron slotted grating-B 125-0,5 m 12/147 CXL ****)	010712837	Ductile iron	500	304	4,10

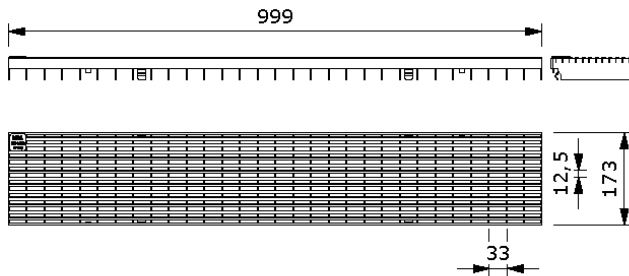

010730814

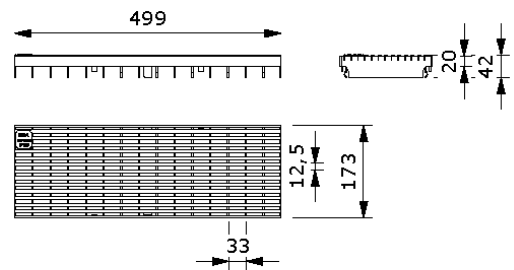

010730816

MEA 150 CLIPFIX, LONGITUDINAL BAR GRATING 31/7, LOADING CLASS B 125 ACCORDING TO EN 1433

Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Galv. Longitudinal bar grating-B 125-1 m 31/7 CXL, heelguard	010730814	Galv. steel	1000	834	5,70
MEA 150 Galv. Longitudinal bar grating-B 125-0,5 m 31/7 CXL, heelguard	010730816	Galv. steel	500	834	3,01
MEA 150 Stainl.steel longitudinal bar grating-B 125-1 m 31/7 CXL, heelguard *)	010730818	Stainl. steel	1000	834	5,98
MEA 150 Stainl.steel longitudinal bar grating-B 125-0,5 m 31/7 CXL, heelguard *)	010730820	Stainl. steel	500	834	3,03

* Delivery time on demand.

** Not suitable for the diagonal or transverse travel of motorways and highways.

**** The surface coating of ductile iron parts only has a temporary and cosmetic function. Ductile iron is virtually impervious to surface oxidation from environmental influences (e.g. thawing salt). Superficial rust does not constitute a product defect. Of course, the resignation of surface coating is in accordance with all corresponding standards


MEA 150 CLIPFIX CHANNEL COVERS

A 15, B 125, C 250, D 400**, E 600**


CW 150



BUILDING SUCCESS

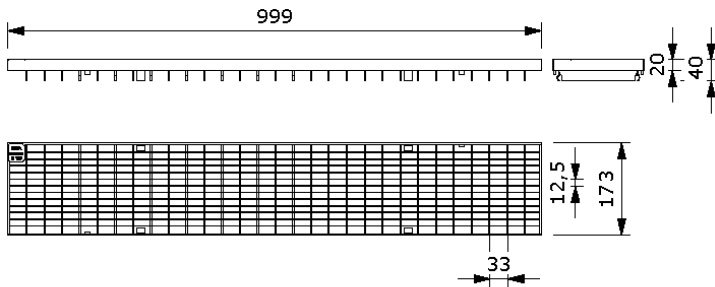


010712834

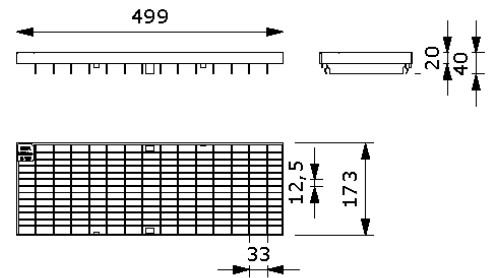

010712836

MEA 150 CLIPFIX, MESH GRATING 30/10, LOADING CLASS B 125 ACCORDING TO EN 1433

Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Galv. mesh grating-B 125-1 m 30/10 CXL	010712834	Galv. steel	1000	1338	4,71
MEA 150 Galv. mesh grating-B 125-0,5 m 30/10 CXL	010712836	Galv. steel	500	1338	2,43
MEA 150 Stainl.steel mesh grating-B 125-1 m 30/10 CXL *)	010152336	Stainl. steel	1000	1338	5,00
MEA 150 Stainl.steel mesh grating-B 125-0,5 m 30/10 CXL *)	010152338	Stainl. steel	500	1338	2,50

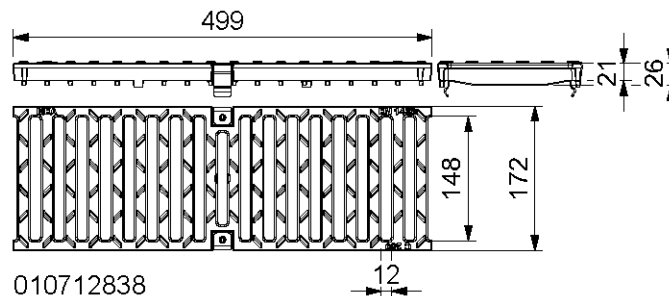

010712838

MEA 150 CLIPFIX, SLOTTED GRATING 12/147, LOADING CLASS C 250 ACCORDING TO EN 1433

Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Ductile Iron slotted grating-C 250-0,5 m 12/147 CXL ****)	010712838	Ductile iron	500	610	5,23

* Delivery time on demand.

** Not suitable for the diagonal or transverse travel of motorways and highways.


**** The surface coating of ductile iron parts only has a temporary and cosmetic function. Ductile iron is virtually impervious to surface oxidation from environmental influences (e.g. thawing salt). Superficial rust does not constitute a product defect. Of course, the resignation of surface coating is in accordance with all corresponding standards

MEA 150 CLIPFIX CHANNEL COVERS


A 15, B 125, C 250, D 400**, E 600**

CW 150


BUILDING SUCCESS

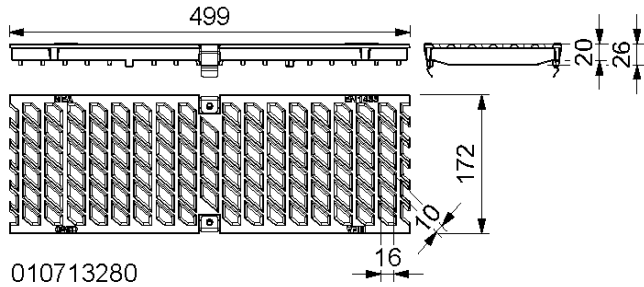


010713280

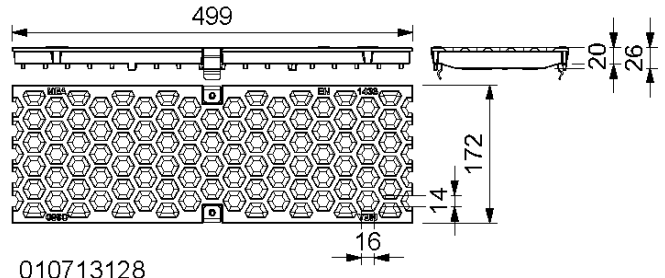

010713128

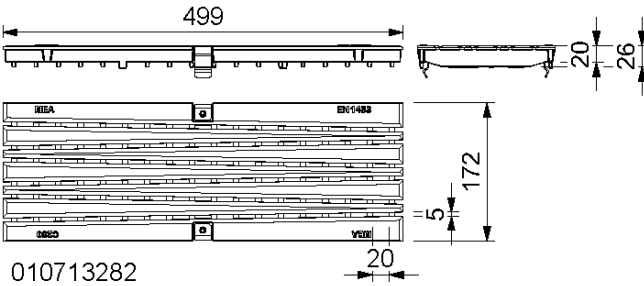


010713282

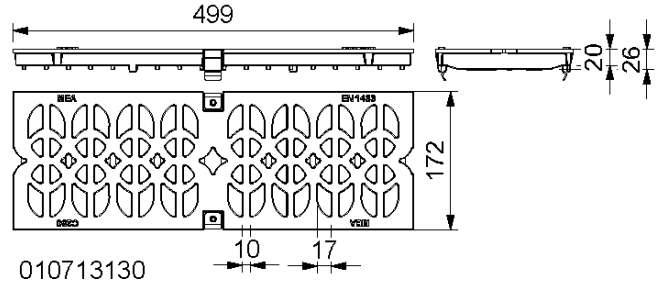


010713130

MEA 150 CLIPFIX, DESIGN GRATINGS, LOADING CLASS C 250 ACCORDING TO EN 1433

Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Design grating BAVARIA-C 250-0,5 m 10/21 CXL ****)	010713280	Ductile iron	500	445	5,00
MEA 150 Design grating HONEYCOMB-C 250-0,5 m 15/17 CXL ****)	010713128	Ductile iron	500	336	5,10
MEA 150 Design grating BACKGAMMON-C 250-0,5 m 20/5 CXL, heelguard ****)	010713282	Ductile iron	500	300	5,40
MEA 150 Design grating CATHEDRAL-C 250-0,5 m 17/42 CXL ****)	010713130	Ductile iron	500	659	5,40

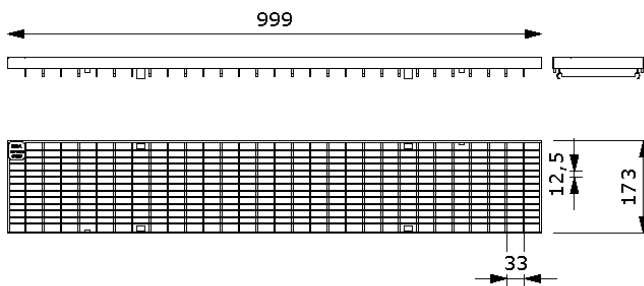

010152340

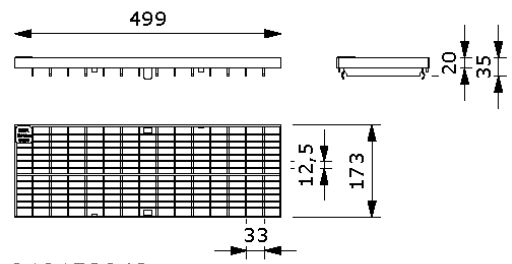

010152342

MEA 150 CLIPFIX, MESH GRATING 30/10, LOADING CLASS C 250 ACCORDING TO EN 1433

Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Galv. mesh grating-C 250-1 m 30/10 CXL *)	010152340	Galv. steel	1000	1338	8,46
MEA 150 Galv. mesh grating-C 250-0,5 m 30/10 CXL *)	010152342	Galv. steel	500	1338	4,16
MEA 150 Stainl. steel mesh grating-C 250-1 m 30/10 CXL *)	010152344	Stainl. steel	1000	1338	8,25
MEA 150 Stainl. steel mesh grating-C 250-0,5 m 30/10 CXL *)	010152346	Stainl. steel	500	1338	4,20

* Delivery time on demand.

** Not suitable for the diagonal or transverse travel of motorways and highways.


**** The surface coating of ductile iron parts only has a temporary and cosmetic function. Ductile iron is virtually impervious to surface oxidation from environmental influences (e.g. thawing salt). Superficial rust does not constitute a product defect. Of course, the resignation of surface coating is in accordance with all corresponding standards

MEA 150 CLIPFIX CHANNEL COVERS

A 15, B 125, C 250, D 400**, E 600**

CW 150


BUILDING SUCCESS

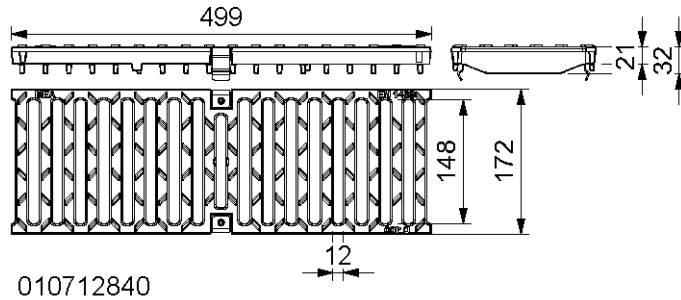


010712840

MEA 150 CLIPFIX, SLOTTED GRATING 12/147, LOADING CLASS D 400** ACCORDING TO EN 1433


Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Ductile Iron slotted grating-D 400-0,5 m 12/147 CXL **) ****)	010712840	Ductile iron	500	610	6,30

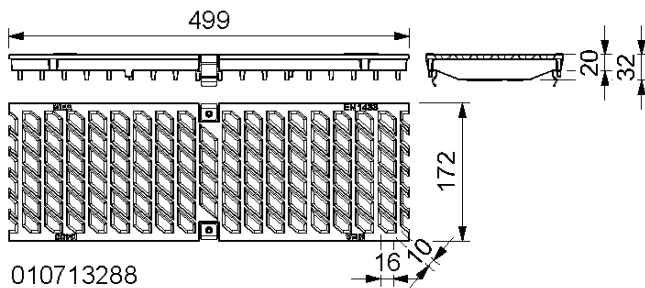


010713288

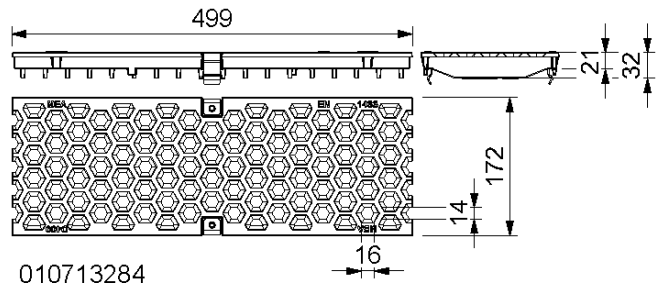

010713284

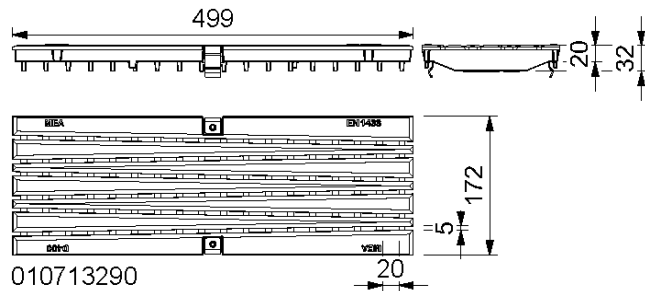

010713290

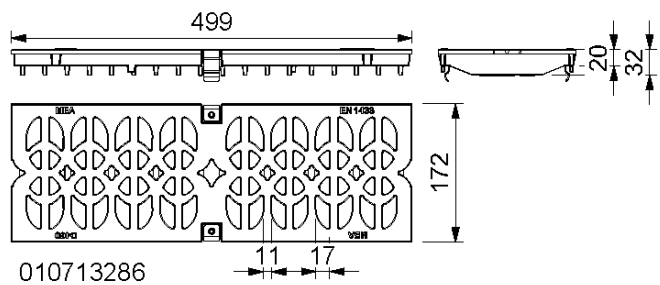

010713286

MEA 150 CLIPFIX, DESIGN GRATINGS, LOADING CLASS D 400** ACCORDING TO EN 1433

Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Design grating BAVARIA-D 400-0,5 m 10/21 CXL *) **) ****)	010713288	Ductile iron	500	445	6,16
MEA 150 Design grating HONEYCOMB-D 400-0,5 m 15/17 CXL *) **) ****)	010713284	Ductile iron	500	336	6,16
MEA 150 Design grating BACKGAMMON-D 400-0,5 m 20/5 CXL, heelguard **) ****)	010713290	Ductile iron	500	300	6,16
MEA 150 Design grating CATHEDRAL-D 400-0,5 m 17/42 CXL **) ****)	010713286	Ductile iron	500	659	6,16

* Delivery time on demand.

** Not suitable for the diagonal or transverse travel of motorways and highways.

**** The surface coating of ductile iron parts only has a temporary and cosmetic function. Ductile iron is virtually impervious to surface oxidation from environmental influences (e.g. thawing salt). Superficial rust does not constitute a product defect. Of course, the resignation of surface coating is in accordance with all corresponding standards


MEA 150 CLIPFIX CHANNEL COVERS

A 15, B 125, C 250, D 400**, E 600**

CW 150




BUILDING SUCCESS

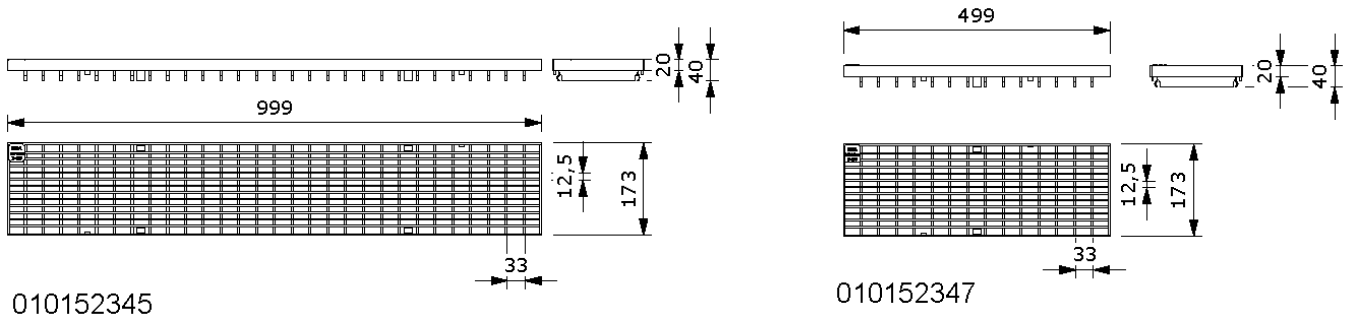

MEA 150 CLIPFIX, MESH GRATING 30/10, LOADING CLASS D 400** ACCORDING TO EN 1433

Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Galv. mesh grating-D 400-1 m 30/10 CXL *) **)	010152345	Galv. steel	1000	1338	10,00
MEA 150 Galv. mesh grating-D 400-0,5 m 30/10 CXL *) **)	010152347	Galv. steel	500	1338	5,00
MEA 150 Stainl.steel mesh grating-D 400-1 m 30/10 CXL *) **)	010152361	Stainl. steel	1000	1338	10,00
MEA 150 Stainl.steel mesh grating-D 400-0,5 m 30/10 CXL *) **)	010152363	Stainl. steel	500	1338	5,00

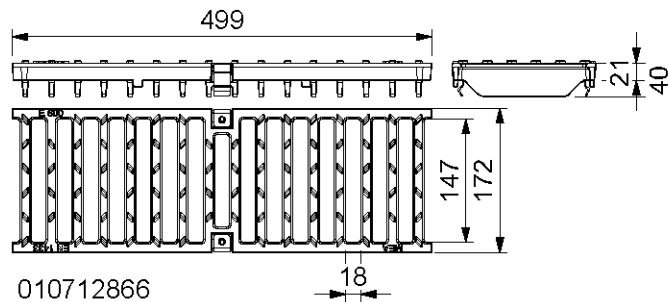

MEA 150 CLIPFIX, SLOTTED GRATING 18/147, LOADING CLASS E 600** ACCORDING TO EN 1433

Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Ductile Iron slotted grating-E 600-0,5 m 18/147 CXL *) **) ****)	010712866	Ductile iron	500	830	6,95

* Delivery time on demand.

** Not suitable for the diagonal or transverse travel of motorways and highways.

**** The surface coating of ductile iron parts only has a temporary and cosmetic function. Ductile iron is virtually impervious to surface oxidation from environmental influences (e.g. thawing salt). Superficial rust does not constitute a product defect. Of course, the resignation of surface coating is in accordance with all corresponding standards


MEA 150 CLIPFIX CHANNEL COVERS

A 15, B 125, C 250, D 400**, E 600**

CW 150



BUILDING SUCCESS

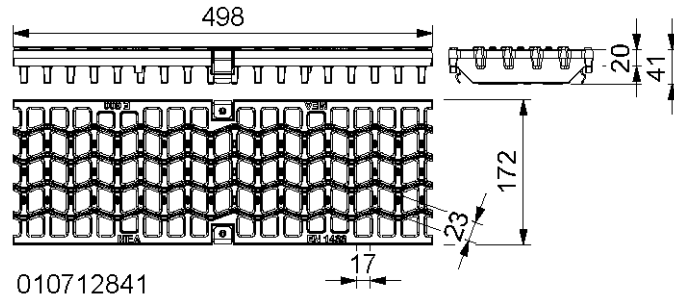

010712841

MEA 150 CLIPFIX, WAVE-GRATING 21/24, LOADING CLASS E 600** ACCORDING TO EN 1433

Designation	Ord. No.	Material	Length [mm]	Inlet sect. area Ø cm ² /m above	kg/unit
MEA 150 Ductile Iron WAVE grating-E 600-0,5 m 21/24 CXL (**) ****)	010712841	Ductile iron	500	405	9,40

GRID HOOK

Designation	Ord. No.	Material	kg/unit
MEADRAIN/MEARIN Grid hook	010152115	Galv. steel	0,23

MEA 150 CLIPFIX ANTI-THEFT PROTECTION

Designation	Ord. No.	Material	kg/unit
MEA 150 CLIPFIX Anti-theft protection, bolt fixing required, 10 Pack	010714707	Stainl. steel, Plastic	1,20

* Delivery time on demand.

** Not suitable for the diagonal or transverse travel of motorways and highways.

**** The surface coating of ductile iron parts only has a temporary and cosmetic function. Ductile iron is virtually impervious to surface oxidation from environmental influences (e.g. thawing salt). Superficial rust does not constitute a product defect. Of course, the resignation of surface coating is in accordance with all corresponding standards

This edition of the technical data sheet shall be valid from March 2022 until a revised version is published and replaces any previous publications. The respectively current version is available for download at www.mea-group.com.

MEA Bautechnik GmbH
 Business unit Water Management
 Sudetenstraße 1
 86551 Aichach
 Tel.: +49 (0) 82 51. 91 0
 Fax: +49 (0) 82 51. 91 13 06
 E-Mail: info@mea-group.com
www.mea-group.com