



Jaymart

Raincheck Fleck Product Information

Designed for internal areas combining a highly effective absorbent plush pile with mono-filaments to improve performance. A prestigious entrance matting/ foyer carpeting range with a subtle fleck design.

Raincheck Fleck

Raincheck Fleck is our new heavy duty 100% Econyl regenerated Nylon pile . super absorbent matting with scientific mono-filaments to aid the brushing and drying action. New Raincheck is available with a subtle fleck design


Raincheck Fleck is designed for heavily trafficked areas and combines maximum moisture absorbency with superior dirt containment

Raincheck Fleck can be incorporated into our prestigious aluminium matting systems.

DDA and Wheelchair compliant matting

Rolls 25m x 2m

Cut Lengths Available

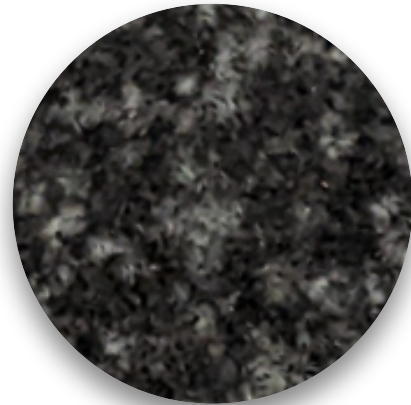

Zigazaga Complies with BS 8300 - 2:2018 for an inclusive and accessible environment

9mm
Gauge

Colours Available




100% Econyl Recycled Nylon Yarn


Raincheck Fleck




Black / Charcoal Fleck (51)

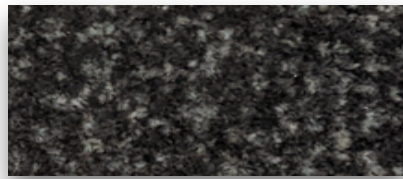

Charcoal / Grey Fleck (56)

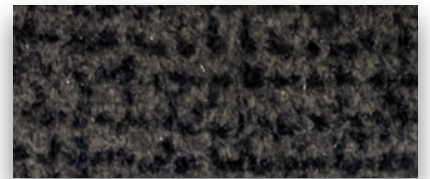

Grey / Charcoal Fleck (71)

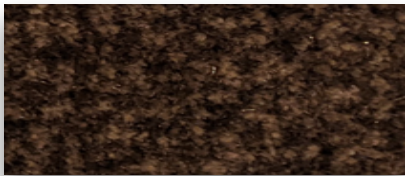

Brown Fleck (81)












Tan Fleck (60)

New Raincheck Specification

Raincheck Uni and Fleck Insert Specification

| | |
|--------------------------------------|--|
| Manufacturing Process | Tufted |
| Gauge | 1/8" Cutpile |
| Pile | 100% Econyl PA66 Recycled |
| | Nylon |
| Primary Backing | Non Woven |
| Backing | PC |
| Width (cm) | 200cm |
| Pile Weight g/m2 | 1000 gr/m2 |
| Total Pile Weight | 3410 gr/ m2 (+/- 15%) |
| Pile Height (mm) | 6.5mm |
| Total Thickness (mm) | 9.0 mm (+15%/ - 10%) |
| Stitches m2 | 138600 |
| Use | Heavy Commercial |
| Luxury/ Comfort | LC4 |
| Castor Chair Suitability | Yes - Permanent Use |
| Stair Suitability | Yes - Permanent Use |
| Colour Fastness To Light | >5 |
| Colour Fastness to Rubbing Dry & Wet | >4 |
| Colour Fastness to Water | >4 |
| Colour Fastness to Soiling | >3.5 |
| Slip Resistance | >0.30 Machine Direction >0.30 Cross Direction |
| Flammability | Bfl-s1 |

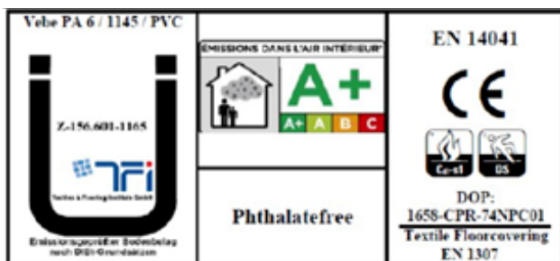



Our 4 step process to a cleaner environment

Step 1

The best way to keep your premises clean is to stop dirt from even getting through the front door. Effective exterior matting scrapes clean and wipes dry, leaving the worst dirt and grit outside, and allowing subsequent interior matting to clean even better.

Step 2

Working in a similar way to exterior matting, this is similarly tough and durable matting that carries on the work to remove the last of the most damaging soil and grit, and continue the drying process.

Step 3

With the worst of the damp and debris now dealt with, secondary internal matting is a high-specification, high-performance product that finishes the dusting and drying.

Step 4

The foyer is one of the highest traffic areas in your building so, however effective your entrance matting, easy to clean, highly durable and attractive carpet that always looks its best will help you make a great first impression – every time.


New Raincheck Installation, Cleaning & Maintenance

Installation

Ideally fully adhered to dry, smooth sub-floors with approved adhesive but can be loose laid if necessary in matwells or as protective runners. Easily cut to size without fraying.

Maintenance

We recommend daily vacuuming with suction attachment for best appearance retention and longer working life.

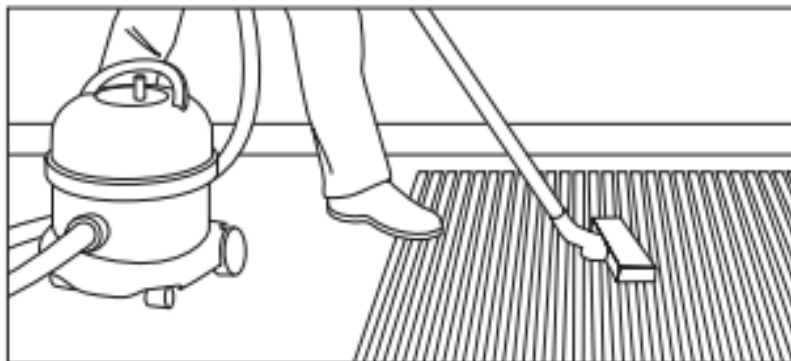

For periodic maintenance the best results can be achieved by the periodic use of a spray or dry extraction carpet cleaning machine, or where possible by the removal of the matting for pressure washing or steam cleaning.

The use of a mild detergent (neutral pH) cleaning solution in the carpet cleaning machine should loosen ingrained soiling and aid the removal of oils and grease.



More stubborn stains should be treated with a solvent based spot remover prior to re-cleaning with the detergent solution.

Chewing gum can be removed by freeze spraying or with a proprietary chewing gum remover and then scraped or combed out of the matting carpet pile. This should be done before the full cleaning process is started.

Environmental Impact/ Responsibility

Our Products Use 100% recycled Aluminium and can be recycled after use making our aluminium mat products very environmentally friendly. This combined with the ability to replace the insert material rather than replacing the whole mat, means that although not directly eligible for BREEAM Credits selecting Jaymart will help in supporting your BREEAM certification.

We Manufacture in the United Kingdom to precise specifications/ measurements. This means Jaymart can reduce waste and transport.

Our products are extremely Hardwearing and will reduce the need for frequent replacement to support BREEAM MAT 05 criteria and also minimise the use of harmful cleaning chemicals and cleaning/ maintenance costs for the end user.

BREEAM MAT 01 addresses the environmental impact through the lifecycle of the product. The Jaymart aluminium entrance matting system have the ability to refurbish rather than replace means that our products can further support your aims. It will also help with meeting BREEAM MAT 06 requirements. We can also offer products made from natural inserts from sustainable sources to further meet environmental aims. The expected useful lifespan when refurbished is 30 years approximately dependent on wear and correct maintenance being carried out.



Proudly Manufactured in The UK



100% Recycled Aluminium





Jaymart

**Jaymart Rubber & Plastics
Limited**

**Roman Way, Crusader
Park,**

Warminster

BA12 8SP

Tel 01985 218994

Email: sales@jaymart.co.uk

www.jaymart.co.uk