



Individual marking  
recommended by  
EN norm 795 of 2012 on  
[www.ancral.com](http://www.ancral.com)



Aluminium safety  
anchor system


**Ancral**<sup>®</sup>

## The system

Ancral®, the aluminium safety anchor system conforms to the **EN norm 795 type A from 2012** which protects from heights.

It comprises a ring (diameter 27mm) for the carabiner, and 2 holes (diameter 13mm, 100mm from one other) to hold it in place.


Ancral® is available untreated or lacquered in RAL 5005 security blue (other RAL colours on demand.)

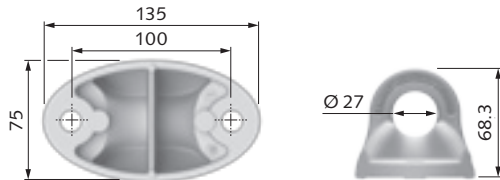


### Advantages :

- individual mark
- ergonomic


### Assembly



Horizontal position



Vertical position



Ceiling position

## Ancral®, the marked anchor point

An individual number is engraved on each anchor point to allow its identification on the building.

This engraving is associated with an online tool which allows:

- registration of the installation and installer (with a secure connection identification),
- User can consult control information and owner of park management.



## Ancral®

Order  Quote request (tick the relevant box)

Company address / company stamp: \_\_\_\_\_

\_\_\_\_\_

Contact: Mr./Mrs \_\_\_\_\_

Telephone: \_\_\_\_\_

Email: \_\_\_\_\_

**Number**      **Finish**



\_\_\_\_\_  Mill finished aluminium



\_\_\_\_\_  Powder coated aluminium in RAL 5005 security blue



\_\_\_\_\_  PPC aluminium in Danilac RAL: \_\_\_\_\_



for more information on Ancral visit the website [www.ancral.com](http://www.ancral.com) or with this Qr code.

